



ISUZU

F-SERIES

The second







**GVW** (26,000 Kgs) **FVM34** T 280 PS Applicable for 25-ft rear body **GVW** (26,000 Kgs)

280 PS Applicable for 32-ft rear body

FVM34 W







## ENGINES

 4HK1-TCC
 FRR 90

 6HK1-TCN
 FSR 34, FVR 34

 6HK1-TCS
 FVM 34 W, FVM 34 T



Featuring our Euro IV compliant engine with Blue Power Technology, which allows our trucks to be more durable and fuel-efficient, to maximize power output, and have low emission ratings. Isuzu's Blue Power technology helps make your truck more powerful, yet economical and environmentally-friendly.

P

ISUZU

FRR90

1

## **Safety and Durability**

# Convenience



#### **High Visibility Meter**

This truck's new design and high visibility instrument cluster gives the driver vehicle status and information at a glance.



IDUCL

FVR34

#### Reinforced Chassis Frame

Built with a reinforced frame to maximize loading capacity, it can accommodate the rear body you require.



**High Rigidity Cab** 

The highly rigid cab and reinforced side impact beams provide safety to both driver and passenger.

## **Spacious Cab Interior**

Reliability does not end with the truck's ability, but also its comfort. With seats ergonomically designed for a naturally-relaxed posture, no trip will keep you from enjoying the ride.




**Easy Egress and Ingress** The built-in step board and steel vertical long grip is designed to provide convenience and safer ingress and egress.



### Power Windows and Auto Door Locks

No need to worry about security. Easily secure your truck with its electronically automated locks and windows.

F-SERIES SPECIFICATIONS										
MODEL		FRR90	FSR34	FVR34	FVM34 T	FVM34 W				
WEIGHT										
Gross Vehicle Weight (GVW)	(kg)	10,600	11,000	16,000	26,000					
Gross Payload	(kg)	7,365	7,100	10,965	19,155	18,995				
ENGINE										
Model		4HK1-TCC	6HK1-	TCN	6HK1-TCS					
Туре		4-Cylinder In-Line, Turbo-Intercooler, Common-Rail Direct Injection, Blue Power Diesel Engine	6-Cylinder In-Line, Turbo-Intercooler, Common-Rail Direct Injection, Blue Power Diesel Engine							
Bore and Stroke	(mm)	Ø 115 × 125								
Displacement	(cc)	5,193 7,790								
Max. Output KW (PS)/rpm	(ISO Gross)	140 (190.0) / 2,600	177 (240	.0) / 2,400	206 (280.0) / 2,400					
Max. Output N-m (kg-m)/rpm	(ISO Gross)	510 (52.0) / 1,600 - 2,600	706 (72.	0) / 1,450	882 (90.0) / 1,450					
Fuel Tank Capacity	(Liter)	200								
	Location	Left								
TRANSMISSION										
Model		MZZ6W	MZ	N6P EATON ES11109DD						
Final Gear Ratio		5.125	4.875	6.143	4.556					
TIRE & WHEEL										
Tire		8.25-R16-16PR	8.25-R20-14PR	11R22.5-16PR						
Number of Tires			7 (Seven) Including Spare Tire	11 (Eleven) Including Spare Tire						
BRAKE										
Service		Drum Type, Air C	Over Hydraulic	Drum Type, Full Air						
Auxiliary				Exhaust Brake						
Parking		Center I	Brake		Wheel Park					
SUSPENSION										
Front and Rear				Multi-Leaf						
ELECTRICAL SYSTEM										
Battery	Specification									
	Location			Right						
CONVENIENCE										
Cab Window		Power Windows								
Cab Door				Auto Door Lock						

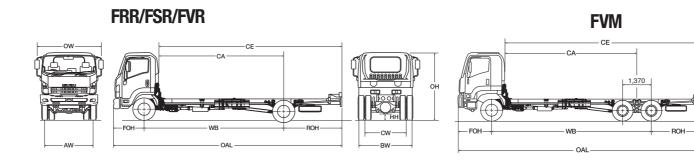

CAB AND CHASSIS DIMENSIONS												
Models	OAL	OAH	WB	FOH	ROH	CE	CA	ow	AW	BW	CW	
FRR 90	7,875	2,540	4,660	1,170	2,045	6,149	4,104	2,200	1,790	2,165	1,660	
FSR 34	8,155	2,680	4,770	1,255	2,130	6,089	3,959	2,200	1,795	2,220	1,700	
FVR 34	9,350	2,940	5,560	1,250	2,540	7,289	4,749	2,485	2,055	2,460	1,850	
FVM 34 T	9,600	2,940	6,335	1,250	2,015	7,539	4,839	2,485	2,055	2,460	1,850	
FVM34 W	11,900	2,940	7,195	1,250	3,455	9,840	5,699	2,485	2,055	2,460	1,850	

### BODY APPLICATIONS





Dealership:







Fuel Tanker



ISUZU PHILIPPINES CORPORATION